



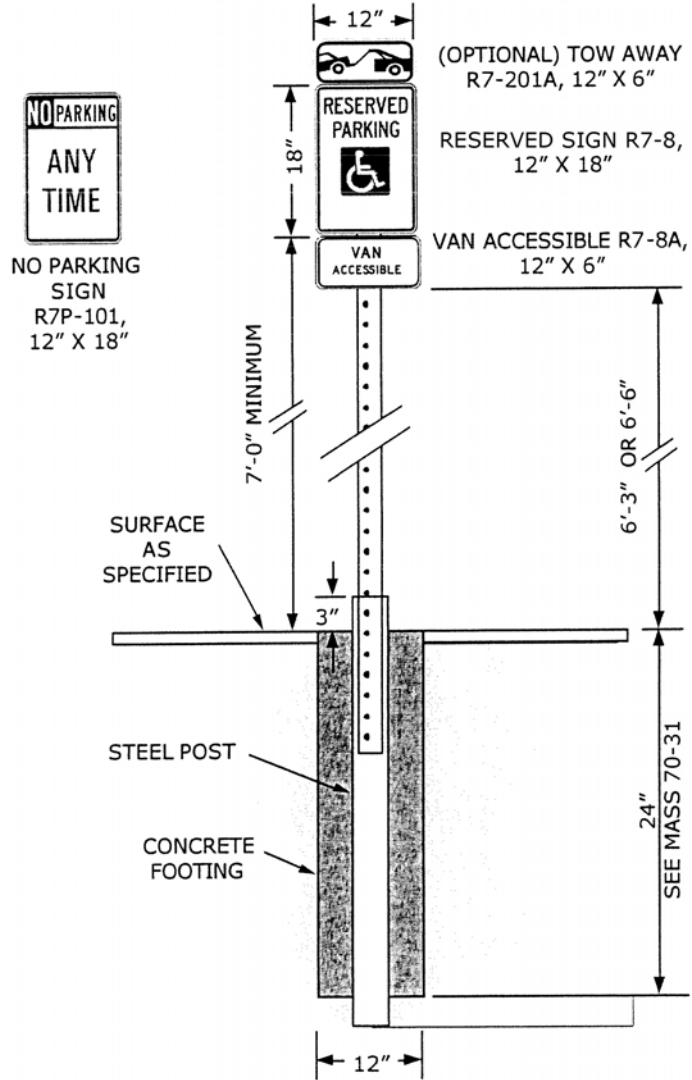

MUNICIPALITY OF ANCHORAGE TRAFFIC DEPARTMENT ACCESSIBLE PARKING SIGN DETAIL

(OFF-STREET PARKING ONLY)

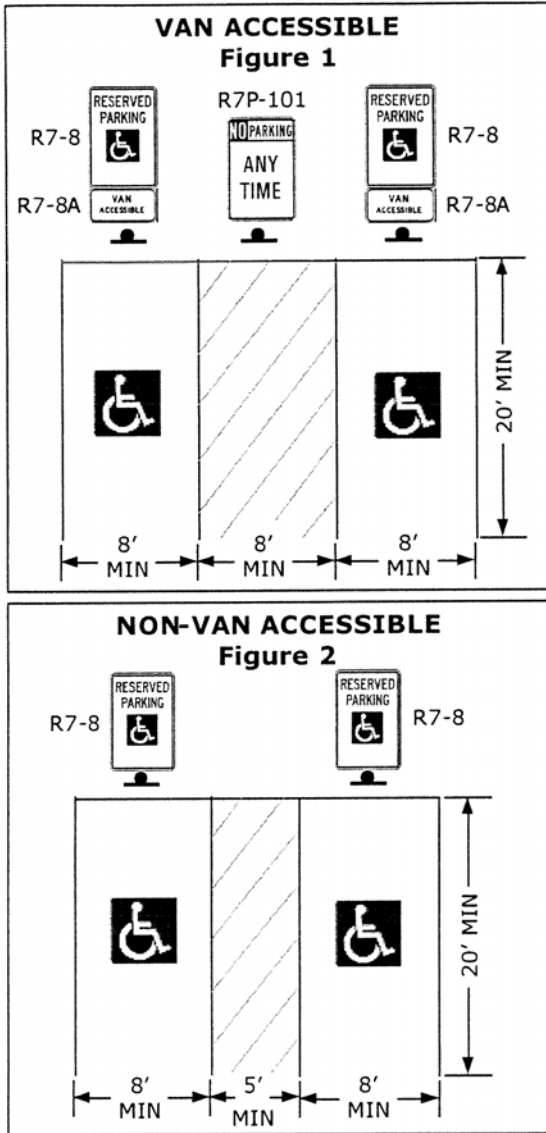

SIGNS CAN BE MOUNTED ON A BUILDING PROVIDED THEY ARE NOT OBSTRUCTED FROM VIEW. MOUNTING HEIGHT ON BUILDINGS IS THE SAME AS POLE HEIGHT MOUNTING.

SIGNS SHALL NOT BE MOUNTED ON DOORS OR WINDOWS AND CAN NOT BE MORE THAN 10 FEET FROM THE EDGE OF THE PARKING STALL.

ALL ACCESSIBLE SPACES SHALL HAVE A R7-8 SIGN. THE R7-8 SIGNS SHALL BE CENTERED ON 8 FOOT PARKING STALL (FIGURE 1).

INSTALL A "NO PARKING" SIGN CENTERED AT LEAST 4 FEET IN FRONT OF THE 8 FOOT WIDE VAN ACCESSIBLE ACCESS AISLE (FIGURE 1).

NON-VAN ACCESSIBLE SPACES REQUIRE A 5 FOOT AISLE WIDTH (FIGURE 2).

AN ACCESS AISLE CAN BE SHARED BY 2 ACCESSIBLE SPACES.

THE FIRST ACCESSIBLE SPACE IN EVERY 8 PROVIDED ACCESSIBLE SPACES MUST BE A VAN ACCESSIBLE SPACE.